


FLP-MA-1120/MA-1240

Mixer Amplifier with USB/ Tuner/ Bluetooth

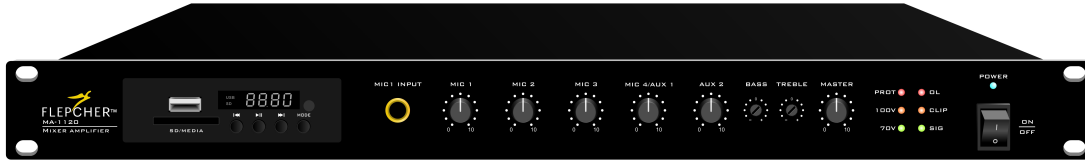

Functions

- With mp3 / TUNER / Bluetooth functions mixer amplifier
- Apply in small places which need Background Music system

Product Features

- With USB/ Tuner/ Bluetooth module and digital screen to display current music from USB
- Suitable for small scale application for paging and BGM
- Remote control over USB/ Tuner/ Bluetooth.
- 1 EMC input, 2 AUX input, 4 MIC input with individual volume control
- Channel priority: M1C1 > EMC > MIC2, MIC3, AUX1, AUX2
- MIC1-4, balanced input, build-in 48V phantom power

Specifications

Model	FLP-MA-1120	FLP-MA-1240
Rated Power	120W	240W
Output Power	70V, 100V	
Input sensitivity	MIC: 5mV ± 1mV LINE: 350mV ± 20mV AUX: 350mV ± 20mV EMC: 775mV ± 40mV	
Pre-output	AUDIO OUT: 1V ± 50mV / 100 Ω	
Mic Tone	Low frequency: ± 10dB at 100Hz High frequency: ± 10dB at 10Hz	
Music Tones	Low frequency: ± 10dB at 100Hz High frequency: ± 10dB at 10Hz	
Effector Parameter		
Frequency Responses	AUDIO OUT: 20Hz ~ 20KHz (±3dB) MIC: 200Hz ~ 16KHz (±3dB)	
SNR	MIC: ≥ 65dB; Music ≥ 70dB	
THD	THD+N ≤ 0.1%	
Indicator	Power Indicator	
Short-Circuit Mode	Short-Circuit, No Voltage	
Protection Mode	Overheat / Short-Circuit	
Voltage	~240V 50Hz	
Power Consumption	200W	370W
Weight	3.6 Kg	3.7 Kg
Dimension	484 x 295 x 44mm	

Back View

